

NOTES: UNLESS OTHERWISE SPECIFIED


- 1. SEE DRAWING NO. CB-00293 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
- 2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
- 3. ALL DIMENSIONS ARE IN INCHES [MM].

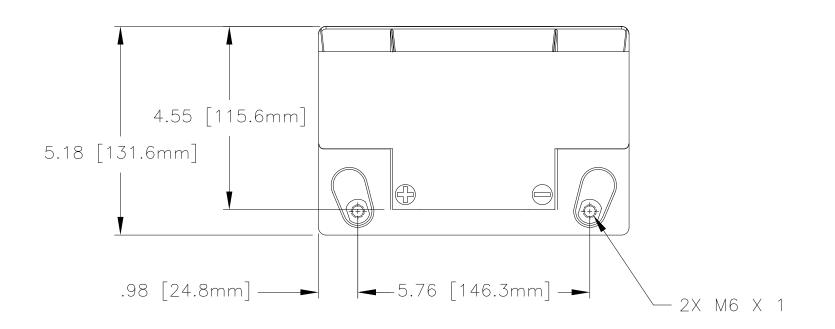

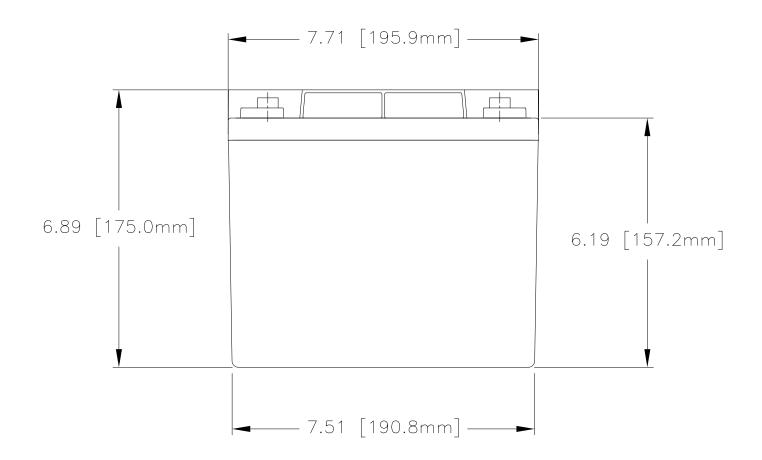


CAPACITY RATINGS	
PART NUMBER	GPL-U1T
nominal weight	24 LBS[10.9 KG]
AMPERE HOUR CAPACITY @ 20 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	33 AH
MINUTES OF DISCHARGE @ 25 AMPS 1.75 VOLTS/CELL @ 77°F (25° C)	50 MIN

	REVISIONS								
REV	DESCRIPTION	DATE	APPROVED						
А	REV TERM SIZE WAS: M8 X 1.25	12/23/00	JBT						
В	REVISED NOTE 1	8/29/16	JG						

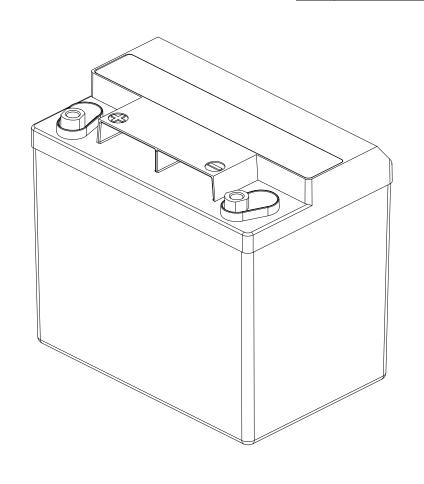

REFERENCE VIEW

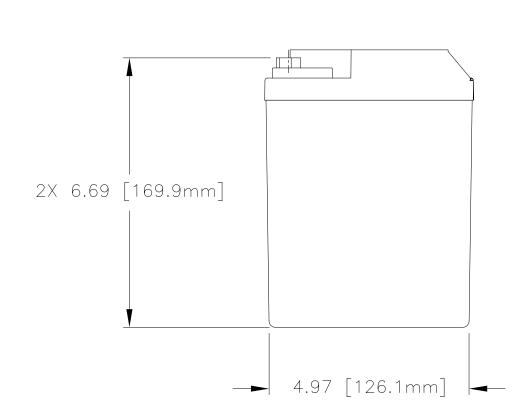

ENVELOPE DRAWING

QTY REQD	CAGE CODE	IC	PART ()ENTIFYIN			OR	ENCLATURE DESCRIPTION TS LIST	MATERIAL ITEM SPECIFICATION NO.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES				CONTRACT NO.			CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
.XX ± .06			APF DRAWN	PROVALS ELH	DATE 3/22/00	BATTERY, 12	2 VOLT, GPL-U1T		
TREATMENT		NONE		CHECKED	S. VALDEZ	3/22/00	SIZE CAGE CODE DW	WG NO.	
FINISH		NONE		APPROVED	DG	3/23/00	C 63017	GPL-U1T B	
SIMILAR TO N/A		ACT WT N/A	CALC WT N/A	ISSUED	JG	9/01/16	scale NONE	SHEET 1 OF 1	