


Rib

APPLICABLE PRODUCTS: All B900 series

This is a general guide to show you how simple it is to install an em-trak AIS transceiver.

If you have any questions at any time you can contact our team support@em-trak.com

- AIS starts up automatically every time engine starts.
- Wireless connection to your phone and any other display device such as chart plotter.
- See all AIS targets and vessel info.

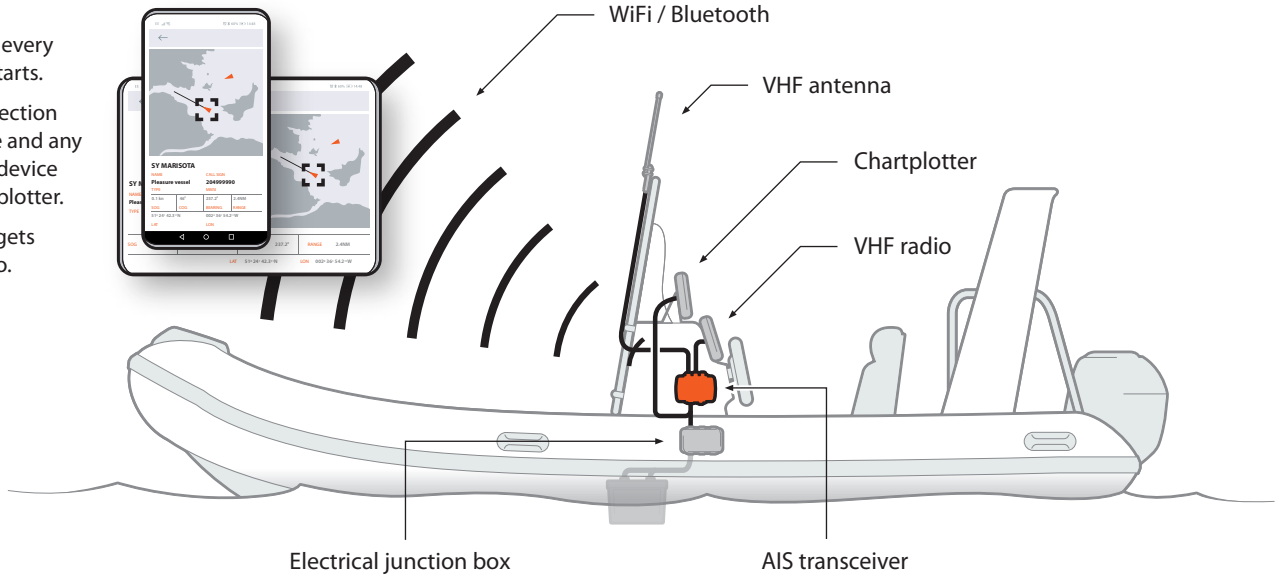

1

No screws required!

Use bracket to fit AIS into convenient storage / utility area.

2

Connect to your VHF radio, VHF antenna and power.

AIS has internal GPS so if you install near a window, under a fibreglass deck or inside a centre console you will not need an external GPS antenna.

3

Switch power on and use **CONNECT-AIS** app or **PROAIS2** PC Software to program AIS with your vessel information.

em-trak CONNECT-AIS

Smartphone / Wireless display device

WiFi / Bluetooth

AIS transceiver

NMEA0183 & 2000

+/-

CONNECT-AIS

4

See AIS targets and information on your chartplotter, smart phone and other wireless devices.

WiFi / Bluetooth

Chartplotter